

**• SYSTEM-10-MOD BTU METER •  
MODBUS RTU or MODBUS TCP COMPATIBLE**



**FEATURES**

**MODBUS Compatible Serial Communications -**

Provides complete energy, flow and temperature data to the control system through a single MODBUS RTU network connection, reducing installation costs.

**Simple Installation and Commissioning -**

Factory programmed and ready for use upon delivery. All process data and programming functions are accessible via front panel display and keypad.

**Single Source Responsibility -**

One manufacturer is responsible for every aspect of the energy measurement process ensuring component compatibility and overall system accuracy.

**N.I.S.T. Traceable Calibration with Certification -**

Each Btu measurement system is individually calibrated using application specific flow and temperature data and is provided with calibration certifications.

**Precision Solid State Temperature Sensors -**

Custom calibrated and matched to an accuracy better than  $\pm 0.15^{\circ}\text{F}$  over calibrated range.

**Highly Accurate Flow Meters -**

ONICON offers a wide variety of insertion and inline type flow measurement technologies including turbine, electromagnetic and vortex sensing. Each type offers unique advantages depending on the application. All ONICON flow meters are individually wet calibrated and designed to operate over a wide flow velocity range with accuracies ranging from  $\pm 0.2\%$  to  $\pm 2.0\%$  of rate depending on the model.

**Complete Installation Package -**

All mechanical installation hardware, color coded interconnecting cabling and installation instructions are provided to ensure error-free installation and accurate system performance.

**DESCRIPTION**

The System-10 BTU Meter provides highly accurate thermal energy measurement in chilled water, hot water and condenser water systems based on signal inputs from two matched temperature sensors (included) and any of ONICON's insertion or inline flow meters (ordered separately). The System-10-MOD provides energy, flow and temperature data on a local alphanumeric display and to the network via the MODBUS RTU or MODBUS TCP communications adapter. An optional auxiliary input is also available to totalize pulses from another device and communicate the total directly to the network.

**APPLICATIONS**

Chilled water, hot water and condenser water systems for:

- Commercial office tenant billing
- Central plant monitoring
- University campus monitoring
- Institutional energy cost allocation
- Performance/efficiency evaluations
- Performance contracting energy monitoring

**ORDERING INFORMATION**

The System-10 BTU Meter is sold complete with temperature sensors and standard thermowells. Flow meters are purchased separately.

| ITEM #   | DESCRIPTION                                     |
|--|---|
| SYSTEM-10-MOD  | System-10 BTU Meter MODBUS compatible           |
| SYSTEM-10-OPT1   | Add for 6" and larger pipes                     |
| SYSTEM-10-OPT2   | Add for 2.5" - 3" copper tube                   |
| SYSTEM-10-OPT3   | Add for 4" copper tube                          |
| SYSTEM-10-OPT4   | Upgrade to outdoor thermowells (pair)           |
| SYSTEM-10-OPT5   | Upgrade to hot tap thermowells (pair)           |
| SYSTEM-10-OPT8   | High temperature sensors (over 200°F)           |
| SYSTEM-10-OPT9   | Add one analog output                           |
| SYSTEM-10-OPT10  | Add four analog outputs                         |
| SYSTEM-10-OPT11  | Auxiliary pulse input                           |
| <b>Choose from the following flow meters:</b>  |   |
| F-1100/F-1200  | Insertion Turbine Flow Meter (1 1/4" - 72")     |
| F-1300   | Inline Turbine Flow Meter (2/3" - 1")           |
| F-2000 Series  | Full Bore Vortex Flow Meter                     |
| F-3000 Series  | Full Bore Electromagnetic Flow Meter            |
| F-3500   | Insertion Electromagnetic Flow Meter (3" - 72") |
| Refer to catalog for flow meter installation kits.<br>Consult with ONICON for additional flow meter types. |   |



PROCESS CONTROL EQUIPMENT  
3GF5

**1500 North Belcher Road, Clearwater, Florida 33765 • Tel (727) 447-6140 • Fax (727) 442-5699**

# SYSTEM-10-MOD BTU METER SPECIFICATIONS



## CALIBRATION

Flow meters and temperature sensors are individually calibrated followed by a complete system calibration. Field commissioning is also available.

## ACCURACY

Differential temperature accuracy  $\pm 0.15^{\circ}\text{F}$  over calibrated range  
Computing nonlinearity within  $\pm 0.05\%$

## PROGRAMMING

Factory programmed for specific application  
Field programmable via front panel interface

## MEMORY

Non-volatile EEPROM memory retains all program parameters and totalized values in the event of power loss.

## DISPLAY

Alphanumeric LCD displays total energy, total flow, energy rate, flow rate, supply temp. and return temp.

Alpha: 16 character, 0.2" high; Numeric: 6 digit, 0.4" high

## OUTPUT SIGNALS

### Network Interface:

Protocol: MODBUS RTU  
Connection: RS485: 2-wire (half duplex)  
TCP/IP: 10 Base T, 10 Mbps, RJ45 Connection  
Baud Rate for RS485: 4800, 9600, 19200, 38400 and 76800

### Partial MODBUS Holding Register List:

| NAME                        | Available Units                                    |
|-----------------------------|--|
| Total Energy                | Btu, kW-hrs & ton-hrs                              |
| Energy Rate                 | Btu/hr, kW & tons                                  |
| Total Flow                  | Gallons, liters & meters <sup>3</sup>              |
| Flow Rate                   | gpm, gph, mgd, l/s, l/m, l/hr & m <sup>3</sup> /hr |
| Supply & Return Temperature | $^{\circ}\text{F}$ and $^{\circ}\text{C}$          |
| Operating Mode              | Single, Dual or Bi-directional                     |
| Mode Status                 | Heating/Cooling or Forward/Reverse Flow            |
| Auxiliary Input Total       | Not Applicable                                     |
| Energy Total Reset          | Not Applicable                                     |
| Flow Total Reset            | Not Applicable                                     |
| Auxiliary Total Reset       | Not Applicable                                     |

### Optional Interval Data Logging:


This option provides up to 24 hours of rate and total data logging in 15 minute intervals. Data includes date/time stamp, measured value & scaling factors when appropriate.

### Isolated solid state dry contact for energy total:

Contact rating: 100mA, 50V  
Contact duration: 0.5, 1, 2, or 6 seconds

## TYPICAL INSTALLATION

Insertion turbine flow meter shown. Any ONICON flow meter may be used with the System-10 BTU Meter. Consult with ONICON for additional flow meter types.

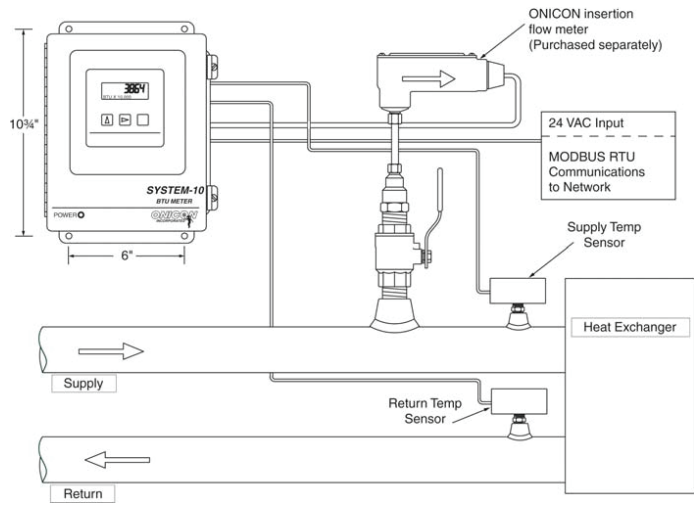

### Optional analog Output(s) (4-20 mA, 0-10 V or 0-5 V):

One or four analog output(s) available for flow rate, energy rate, supply/return temps or delta-T.

### LIQUID FLOW SIGNAL INPUT

0-15 V pulse output from any ONICON flow meter.

### TEMPERATURE SENSORS

Solid state sensors are custom calibrated using N.I.S.T. traceable temperature standards.  
Current based signal (mA) is unaffected by wire length.

### TEMPERATURE RANGE

Liquid temperature range:  $32^{\circ}$  to  $200^{\circ}\text{F}$   
Optional liquid temperature range:  $122^{\circ}$  to  $302^{\circ}\text{F}$   
Ambient temperature range:  $-20^{\circ}$  to  $140^{\circ}\text{F}$

### MECHANICAL

#### Electronics Enclosure:

Standard: Steel NEMA 13, wall mount, 8"x10"x4"  
Optional: NEMA 4 (Not UL listed)  
Approximate weight: 12 lbs

#### Temperature Thermowells:

Standard: 1/2" NPT brass thermowells (length varies with pipe size) with junction box

Note: 6" pipes and larger require SS thermowell option.

- Optional:
- 1/2" NPT stainless steel thermowells
  - Outdoor junction box with thermal insulation
  - Hot tap thermowells with isolation valves are available in plated brass or stainless steel.

### ELECTRICAL

#### Input Power\*:

Standard: 24 VAC 50/60 Hz, 500 mA  
Optional: 120 VAC 50/60 Hz, 200 mA  
230 VAC, 50 Hz, 150 mA

\*Based on Btu meters configured for network connection without the optional analog outputs

#### Internal Supply:

Provides 24 VDC at 200 mA to electronics and flow meter

#### Wiring:

Temperature signals: Use 18-22 ga twisted shielded pair

Flow signals: Use 18 - 22 ga shielded - see flow meter specification sheet for number of conductors

Note: Specifications are subject to change without notice.