

• **F-5100 SERIES** •
**THERMAL MASS
FLOW METER**



Made in America

DESCRIPTION

ONICON's F-5000 Series Thermal Mass Flow Meters provide accurate mass flow measurement of natural gas, compressed air and other industrial gases. The proprietary sensor design measures mass flow directly and does not require additional pressure or temperature compensation to deliver accurate flow data.

The F-5100 is available as an inline or an insertion style meter. Both are provided with a bright, easy-to-read display and include a 4-20 mA output for flow rate with a separate pulse output for totalizing flow.

APPLICATIONS

- Natural Gas
- Compressed Air
- Other Combustible Gases
- Industrial Gases

GENERAL SPECIFICATIONS

ACCURACY

Natural Gas / Propane Gas
± 1.0% of reading from 500 – 7000 SFPM
± 2.0 % of reading from 100 – 500 SFPM
Compressed Air & other high velocity calibrations
± 1.0 % of reading + 0.5% of scale over a
100:1 turndown

OVERALL FLOW RANGE

5 to 35,000 SFPM

SENSING METHOD

Thermal mass flow utilizing hybrid analog/digital sensing circuitry

PIPE SIZE RANGE

Insertion style - 1" through 24" nominal diameter
Inline style - ¼" through 4" nominal diameter

INPUT POWER OPTIONS

Standard
24 VDC ±10%, 100 mA maximum current
Optional
90-265 VAC 50/60 Hz
12 VDC ±10%, 200 mA maximum current

CALIBRATION

Every ONICON flow meter is wet calibrated in a flow laboratory against standards that are directly traceable to N.I.S.T. A certificate of calibration accompanies every meter.

FEATURES

Excellent Long Term Reliability -

ONICON thermal mass flow meters employ a low maintenance, non-moving parts technology to sense flow and are generally unaffected by debris in the flow stream.

Highly Accurate Over A Wide Operating Range -

Our proprietary hybrid analog/digital sensing circuitry is very stable and yet highly responsive to changes in flow. This stable yet responsive design allows for accurate flow measurement over a very wide operating range (over 1000:1 for the inline version). It also makes the meter ideal for measuring low flow rates.

Provides For Field Validation Of Calibration -

The F-5100 continuously displays a special calibration value that provides a fast, easy way to confirm that the calibration is valid.

Inline Meters are Provided With Built-in Flow Conditioners -

Flow conditioners are built in to all ½" through 4" diameter inline meters. The flow conditioner significantly reduces overall straight run requirements for installation.

Insertion Meters Can Be Installed Without Interrupting Gas Service* -

ONICON's hot tap design allows for installation without interruption to the gas service. The meter can also be removed for service without disrupting flow.

Excellent Value -

ONICON Insertion style meters are accurate, easy-to-use and reliable. They are also priced independently of pipe size. This makes them an excellent value, particularly in larger diameter pipes.

* See note on next page.



The optional D-100 Flow Display provides a local indication of rate and total and a network interface for BACnet, MODBUS, LonWorks, JCI - N2, or Siemens - P1 FLN networks.

GENERAL SPECIFICATIONS (cont.)

FLUID TEMPERATURE RANGE

-40° F to 200° F standard

Note: Temperatures above 150° F require remote mount transmitter

(Consult ONICON for other operating ranges.)

AMBIENT TEMPERATURE RANGE

0° F to 150° F

MAXIMUM OPERATING PRESSURE

Standard: 500 PSI

Optional: 1,000 PSI

PRESSURE DROP (@ 2500 SFPM, 70° F and 2 PSIG)

Insertion Meter - Less than 0.5" W.C. (H₂O) in 1½" diameter pipes, decreasing in larger pipes

Inline Meter - (with built-in flow conditioner)

Less than 0.5" W.C (H₂O) in 2" and larger diameter meters

Less than 0.9" W.C (H₂O) in 1" and 1½" diameter meters

OUTPUT SIGNALS PROVIDED

Analog output: 4-20 mA

Scalable pulse output: Active 24 VDC pulse,

500ms duration (Optional pulse isolator available.)

Network Interface:

Protocol: MODBUS RTU

Connection: RS485, 2-wire (half-duplex)

Baud Rate: 9600 or 19200

MATERIAL

Wetted metal components: 316 stainless steel

ELECTRONICS ENCLOSURE

Integral mount, weathertight NEMA 4 aluminum enclosure

Optional remote mount version of transmitter available (1000 ft maximum length)

ELECTRICAL CONNECTIONS

Enclosed terminal blocks, cable access through two ½" NPT conduit fittings

Optional remote mount version of transmitter available (1000ft maximum length)

APPROVALS

The 24 VDC versions of this product have been tested by Met Laboratories to the following standards:

UL 61010-1/CSA C22.2 No. 61010-1 Electrical Equipment for Measurement, Control and Laboratory Use; Part 1: General Requirements

CAN/CSA-C22.2 No. 157-92 Intrinsically Safe and Non-incendive Equipment for Use in Hazardous (Classified) Locations

CSA C22.2 No. 213-M1987 Non-incendive Electrical Equipment for Use in Class I, Division 2 Hazardous Locations

ATEX: Ex, nA IIC T4X


* Installations must comply with federal, state and municipal building codes. Review all proposed combustible gas installations with your local code enforcement officials before attempting any installation.

NOTE: Specifications are subject to change without notice.



ELECTRICAL CONNECTIONS

Inside Rear Cover

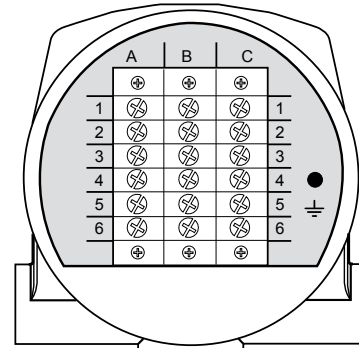


Terminal Wiring Connections

	A	B	C
1	NA	AC1	NA
2	NA	AC2	RS 485 (+)
3	NA	NA	RS 485 (-)
4	NA	NA	Pulse Out (+)
5	NA	+ 24 VDC	4-20mA Out (+)
6	NA	VDC Common	VDC Common


Operating range for common pipe sizes 5 to 7000 SFPM in schedule 40 pipe

Pipe Size in inches	Flow Rate in SCFH	
	Min	Max
¼	0.2	304
⅜	0.4	557
½	0.6	886
¾	1.1	1,560
1	1.8	2,521
1¼	3.1	4,362
1½	4.2	5,938
2	7.0	9,740
2½	10	13,964
3	15	21,562
4	27	37,130
5	42	58,350
6	60	84,263
8	104	145,912

F-5100 TYPICAL INSERTION METER INSTALLATION

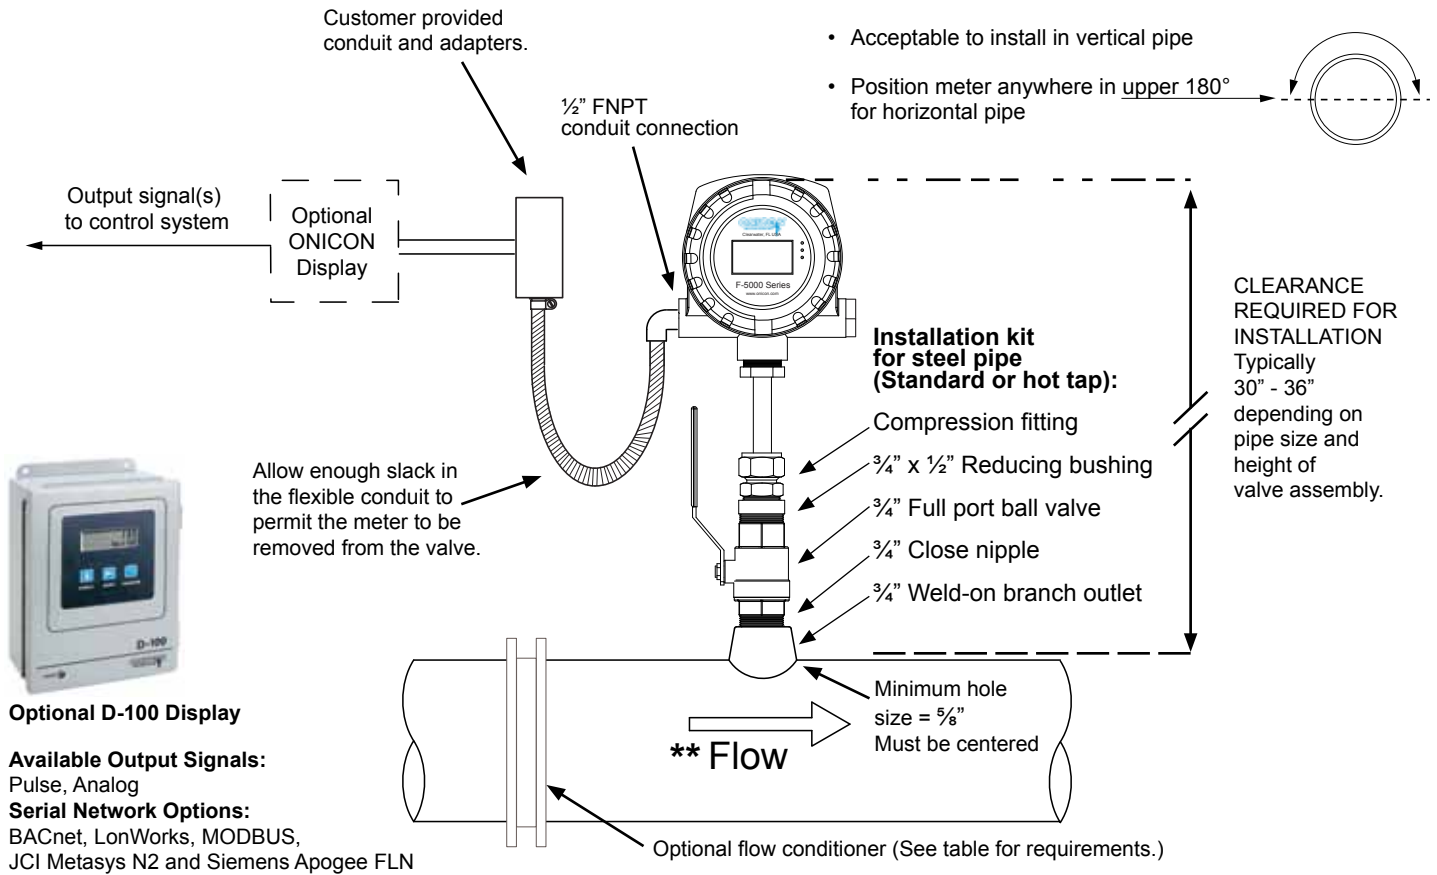

F-5100 TYPICAL INLINE METER INSTALLATION

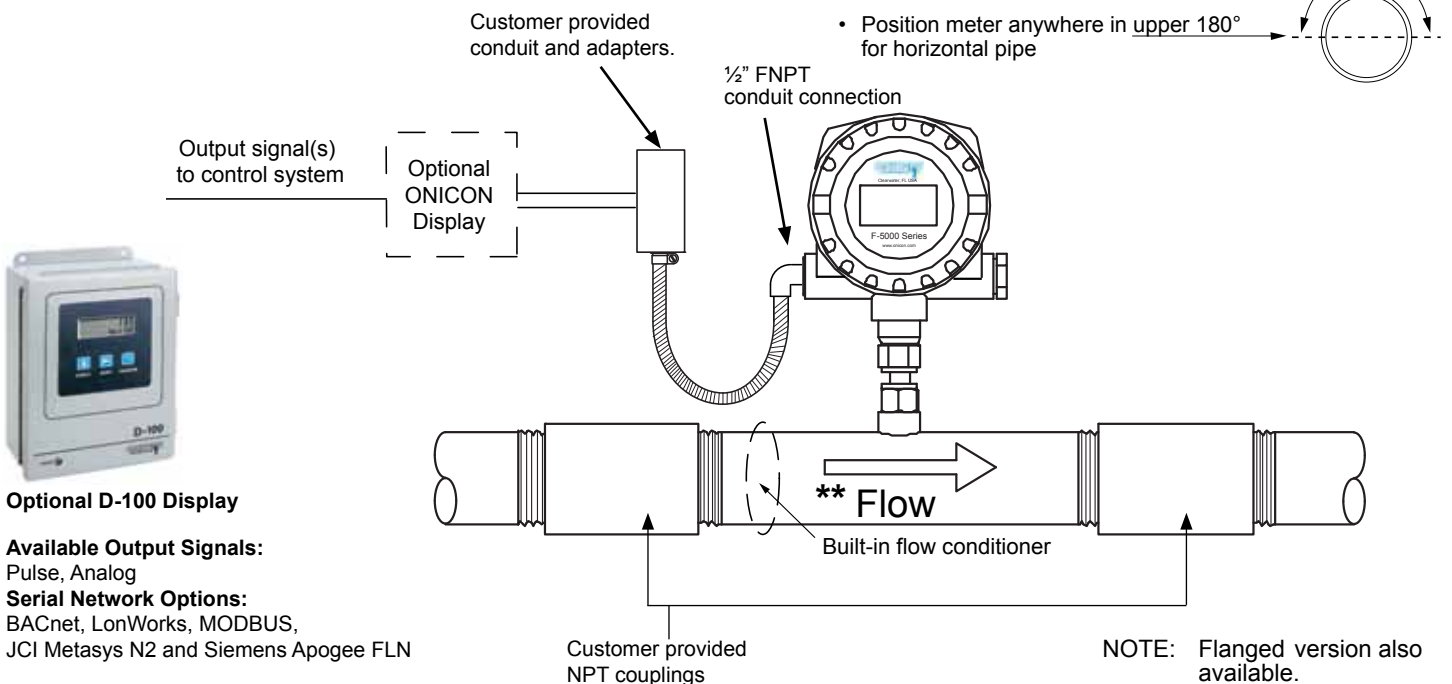

** Standard orientation. Contact ONICON for other options.

1500 North Belcher Road, Clearwater, FL 33765 • Tel (727) 447-6140 • Fax (727) 442-5699

ORDERING INFORMATION



F-5100 Thermal Mass Model # Codification F-51AA-1BCD-EFF

F-51 = Thermal Mass Flow Meter With Display, 4 - 20 mA & Scaled Pulse Outputs

AA = Pipe Diameter

00 = Insertion	13 = 1 1/4"
14 = 1/4"	15 = 1 1/2"
38 = 3/8"	02 = 2"
12 = 1/2"	25 = 2 1/2"
34 = 3/4"	03 = 3"
01 = 1"	04 = 4"

B = Line Voltage

1 = 24 VDC (standard)
 2 = 90 - 265 VAC 50/60 Hz (optional)
 3 = 12 VDC (optional)

C = Integral or Remote Mount

1 = Integral
 2 = Remote

D = Process Connections

0 = Insertion
 1 = Threaded MNPT Connections
 2 = ANSI Class 150 Flange
 3 = ANSI Class 300 Flange

E = Flow Conditioner

1 = Insertion meter without conditioner
 2 = Insertion meter with conditioner
 3 = Inline meter

FF = Gas Type

NG = Natural Gas	O2 = Oxygen Gas
ME = Methane Gas	DA = Duct / Flue Air
PG = Propane Gas	HE = Helium Gas
CA = Compressed Air	NI = Nitrogen Gas
	XX = Other Gases

F-5100 Thermal Mass Meter Accessory Ordering Information

Item #	Accessory Item Description
Install kits for carbon steel pipe	
INSTL64	Installation kit for welded carbon steel pipe, 50 PSIG, 200°F max
INSTL69	Stainless steel installation kit for welded carbon steel pipe, 50 PSIG, 200°F max
INSTL70	Installation kit for welded carbon steel pipe, 250 PSIG, 140°F max
INSTL71	Installation kit for welded carbon steel pipe, 500 PSIG, 140°F max
INSTL72	Stainless steel installation kit for welded carbon steel pipe, 600 PSIG, 600°F max
Install kit for stainless steel pipe	
INSTL82	Stainless steel installation kit for welded stainless steel pipe, 250 PSIG, 140°F max
Flow meter accessory items	
17350	25 ft of additional remote mount cable
17351	50 ft of additional remote mount cable
17352	100 ft of additional remote mount cable
17920	Pulse isolator module (converts active pulse output to dry contact)