

• **INLINE FLOW METER** •
MODEL F-1320 TURBINE
DIVIDED OUTPUT



Made in the USA

DESCRIPTION

ONICON inline turbine flow meters are suitable for measuring electrically conductive water-based liquids. The F-1320 model provides a binary (digital) dry contact output signal corresponding to flow rate, which is divided to meet the monitoring system input frequency limitation.

CALIBRATION

Every ONICON flow meter is wet-calibrated in our flow laboratory against primary volumetric standards directly traceable to NIST. Certification of calibration is included with every meter.

FEATURES

Unmatched Price vs. Performance - Custom calibrated, highly accurate instrumentation at very competitive prices.

Excellent Long-term Reliability - Patented electronic sensing is resistant to scale and particulate matter. Low mass turbines with engineered jewel bearing systems provide a mechanical system that virtually does not wear.

Industry Leading Two-year "No-fault" Warranty - Reduces start-up costs with extended coverage to include accidental installation damage (miswiring, etc.). Certain exclusions apply; see our complete warranty statement for details.

APPLICATIONS

- Chilled water, hot water, condenser water, and water/glycol/brine for HVAC
- Process water and water mixtures
- Domestic water

GENERAL SPECIFICATIONS

ACCURACY

- ± 0.5% OF READING at calibrated velocity
- ± 2% OF READING from 0.8 to 38 GPM (50:1 range)

SENSING METHOD

Electronic impedance sensing
(non-magnetic and non-photoelectric)

PROCESS CONNECTIONS

Threaded or sweat union fittings
3/4" or 1"

SUPPLY VOLTAGE

24±4 V AC/DC at 30 mA

LIQUID TEMPERATURE RANGE

Standard: 180° F continuous, 200° F peak
High Temp: 280° F continuous, 300° F peak

AMBIENT TEMPERATURE RANGE

-5 to 160° F (-20 to 70° C)

OPERATING PRESSURE

400 PSI maximum

PRESSURE DROP

3 PSI at maximum flow rate

OUTPUT SIGNALS PROVIDED:

DIVIDED CONTACT OUTPUT

Isolated solid state dry contact
Contact rating: 100 mA, 50V

FREQUENCY OUTPUT

0-15 V peak pulse, typically less than 300 Hz

MATERIAL

Brass housing and stem
Sapphire bearings and tungsten carbide shaft

ELECTRONICS ENCLOSURE


Weathertight aluminum enclosure

ELECTRICAL CONNECTIONS


4-wire minimum for divided switch output
Standard: 10' of cable with 1/2" NPT conduit connection

Optional: Indoor DIN connector with 10' of plenum rated cable

Also Available




Display Modules



BTU Measurement Systems

F-1320 Wiring Diagram

Flow Meter into Control System (No Display or BTU Meter)

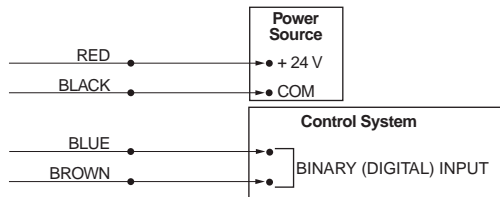


- NOTE: 1. Black wire is common with the pipe ground (typically earth ground).
 2. Frequency output required for ONICON display module or BTU meter, refer to wiring diagram for peripheral device.


F-1320 Wiring Information

WIRE COLOR CODE		NOTES
RED	(+) 24 V AC/DC supply voltage, 30 mA	Connect to power supply positive
BLACK	(-) Common ground (Common with pipe ground)	Connect to power supply negative
GREEN	(+) Frequency output signal: 0-15 V peak pulse	Required when meter is connected to local display or BTU meter
BLUE	Dry contact switch output	Output can be divided by any binary number up to 4096 to meet frequency limitations of control system
BROWN		

Inline Flow Meter Dimensions

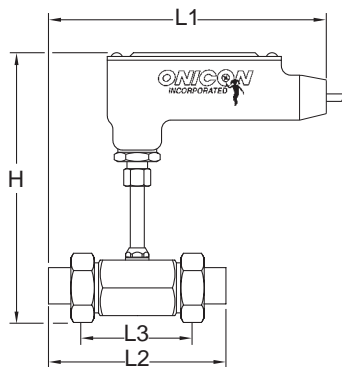



Sweat		Threaded
9"	L1	10 1/4"
5 3/8"	L2	8 5/8"
3 1/4"	L3	3 1/4"
8"	H	8"
2"	MAX WIDTH	2"

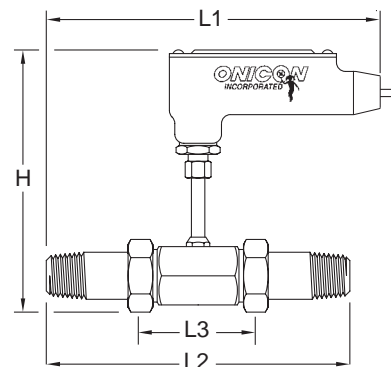

Typical Meter Installation

(New construction or scheduled shutdown)

- Flush piping system thoroughly before installing meter
- Acceptable to install in vertical pipe
- Position meter anywhere in upper 180° for horizontal pipe

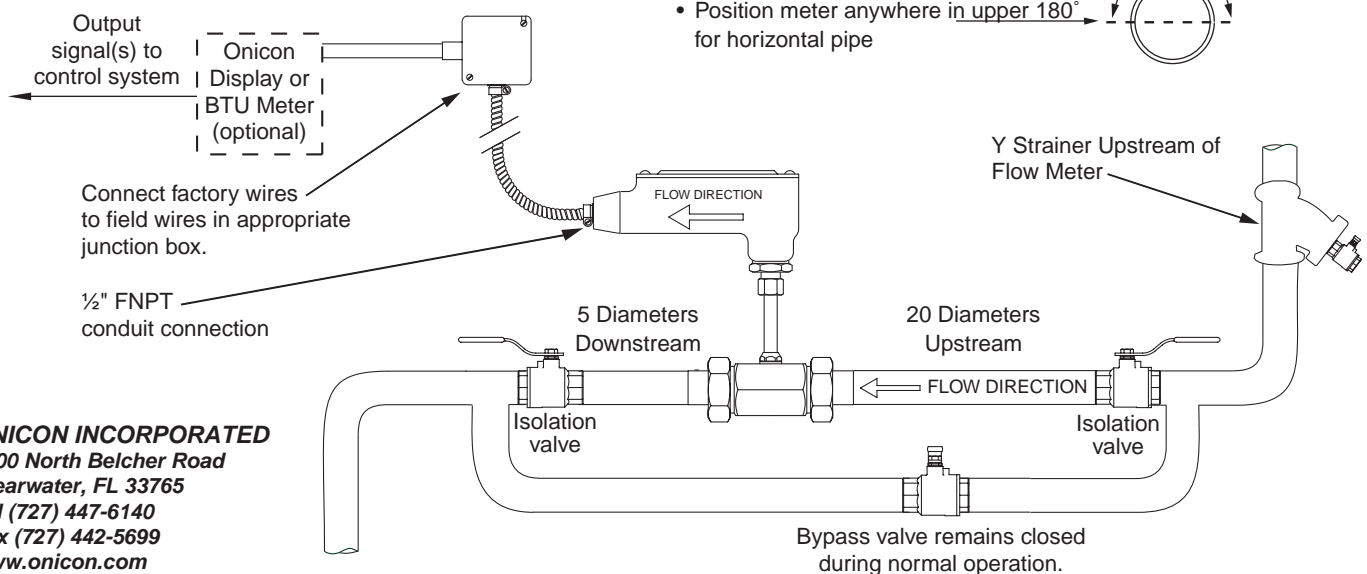

ONICON INCORPORATED
 1500 North Belcher Road
 Clearwater, FL 33765
 Tel (727) 447-6140
 Fax (727) 442-5699
www.onicon.com
sales@onicon.com