

• **FB-1210 DUAL TURBINE** •  
**BI-DIRECTIONAL**  
**INSERTION FLOW METER**  
**ANALOG OUTPUT**



Made in the USA

**DESCRIPTION**

ONICON insertion turbine flow meters are suitable for measuring electrically conductive water-based liquids. The FB-1210 model provides non-isolated 4-20 mA and 0-10 V analog output signals that are linear with the flow rate, as well as a binary (digital) dry contact output for flow direction.

**APPLICATIONS**

- Primary secondary decoupling loop (bypass)
- HVAC thermal storage tank
- Domestic water tank charge/discharge

**GENERAL SPECIFICATIONS**

**ACCURACY**

- ± 0.5% OF READING at calibrated velocity
- ± 1% OF READING from 3 to 30 ft/s (10:1 range)
- ± 2% OF READING from 0.4 to 20 ft/s (50:1 range)

**SENSING METHOD**

Electronic impedance sensing  
 (non-magnetic and non-photoelectric)

**PIPE SIZE RANGE**

2½" through 72" nominal

**SUPPLY VOLTAGE**

24±4 V AC/DC at 90 mA

**LIQUID TEMPERATURE RANGE**

Standard: 180° F continuous, 200° F peak  
 High Temp: 280° F continuous, 300° F peak  
 Meters operating above 250° F require  
 316 stainless steel construction option

**AMBIENT TEMPERATURE RANGE**

-5 to 160° F (-20 to 70° C)

**OPERATING PRESSURE**

400 PSI maximum

**PRESSURE DROP**

Less than 1 PSI at 20 ft/s in 2½" pipe,  
 decreasing in larger pipes and lower velocities

**OUTPUT SIGNALS PROVIDED:**

**DIRECTIONAL CONTACT OUTPUT**

Isolated solid state dry contact  
 Contact rating: 100 mA, 50V  
 Latches at 0.18 ft/s  
 Switches within 20 seconds of direction change

**ANALOG OUTPUTS (NON-ISOLATED)**

Voltage output: 0-10 V (0-5 V available)  
 Current output: 4-20 mA

**FREQUENCY OUTPUT**

0-15 V peak pulse, typically less than 300 Hz

**CALIBRATION**

Every ONICON flow meter is wet-calibrated in our flow laboratory against primary volumetric standards directly traceable to NIST. Certification of calibration is included with every meter.

**FEATURES**

**Unmatched Price vs. Performance** - Custom calibrated, highly accurate instrumentation at very competitive prices.

**Excellent Long-term Reliability** - patented electronic sensing is resistant to scale and particulate matter. Low mass turbines with engineered jewel bearing systems provide a mechanical system that virtually does not wear.

**Industry Leading Two-year "No-fault" Warranty** - Reduces start-up costs with extended coverage to include accidental installation damage (miswiring, etc.). Certain exclusions apply; see our complete warranty statement for details.

**Installation Flexibility** - Patented dual turbine models deliver outstanding accuracy in short pipe runs.

**Simplified Hot Tap Insertion Design** - Standard on every insertion flow meter. Allows for insertion and removal by hand without system shutdown.

OPERATING RANGE FOR COMMON PIPE SIZES 0.17 TO 20 ft/s ± 2% accuracy begins at 0.4 ft/s	
Pipe Size (Inches)	Flow Rate (GPM)
2½	2.5 - 230
3	4 - 460
4	8 - 800
6	15 - 1800
8	26 - 3100
10	42 - 4900
12	60 - 7050
14	72 - 8600
16	98 - 11,400
18	120 - 14,600
20	150 - 18,100
24	230 - 26,500
30	360 - 41,900
36	510 - 60,900

(continued on back)

# FB-1210 SPECIFICATIONS cont.

## MATERIAL

- Wetted metal components
  - Standard: Electroless nickel plated brass
  - Optional: 316 stainless steel

## ELECTRONICS ENCLOSURE

- Standard: Weathertight aluminum enclosure
- Optional: Submersible enclosure


## ELECTRICAL CONNECTIONS

- 5-wire minimum for directional switch and either 4-20 mA or 0-10 V output
- Second analog output and/or frequency output requires additional wires
- Standard: 10' of cable with 1/2" NPT conduit connection
- Optional: Plenum rated cable

# FB-1210 Wiring Information


WIRE COLOR CODE		NOTES
RED	(+) 24 V AC/DC supply voltage, 90 mA	Connect to power supply positive
BLACK	(-) Common ground (Common with pipe ground)	Connect to power supply negative & analog input ground
GREEN	(+) Frequency output signal: 0-15 V peak pulse	Required when meter is connected to local display or BTU meter
BLUE	(+) Analog signal: 4-20 mA (non-isolated)	Both signals may be used independently
BROWN	(+) Analog signal: 0-10 V (non-isolated)	
GRAY	Dry contact directional output - indicates flow direction	Contact closed when flow is in direction of arrow on meter
VIOLET		
DIAGNOSTIC SIGNALS		
ORANGE	Bottom turbine frequency	These signals are for diagnostic purposes - connect to local display or BTU meter
WHITE	Top turbine frequency	

## ALSO AVAILABLE

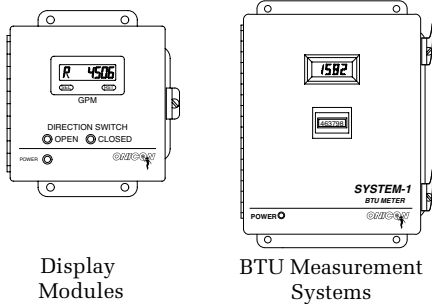

## FB-1210 Wiring Diagram


Flow Meter into Control System (No Display or BTU Meter)

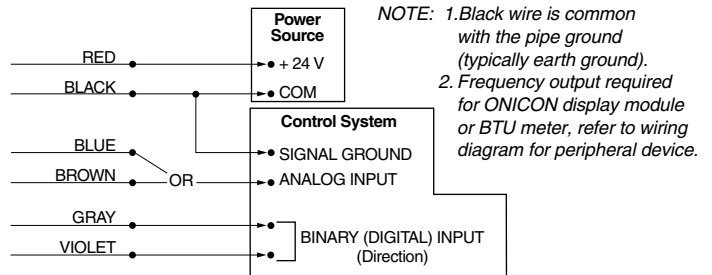

## Typical Meter Installation

(New construction or scheduled shutdown)

- Acceptable to install in vertical pipe
- Position meter anywhere in upper 180° for horizontal pipe

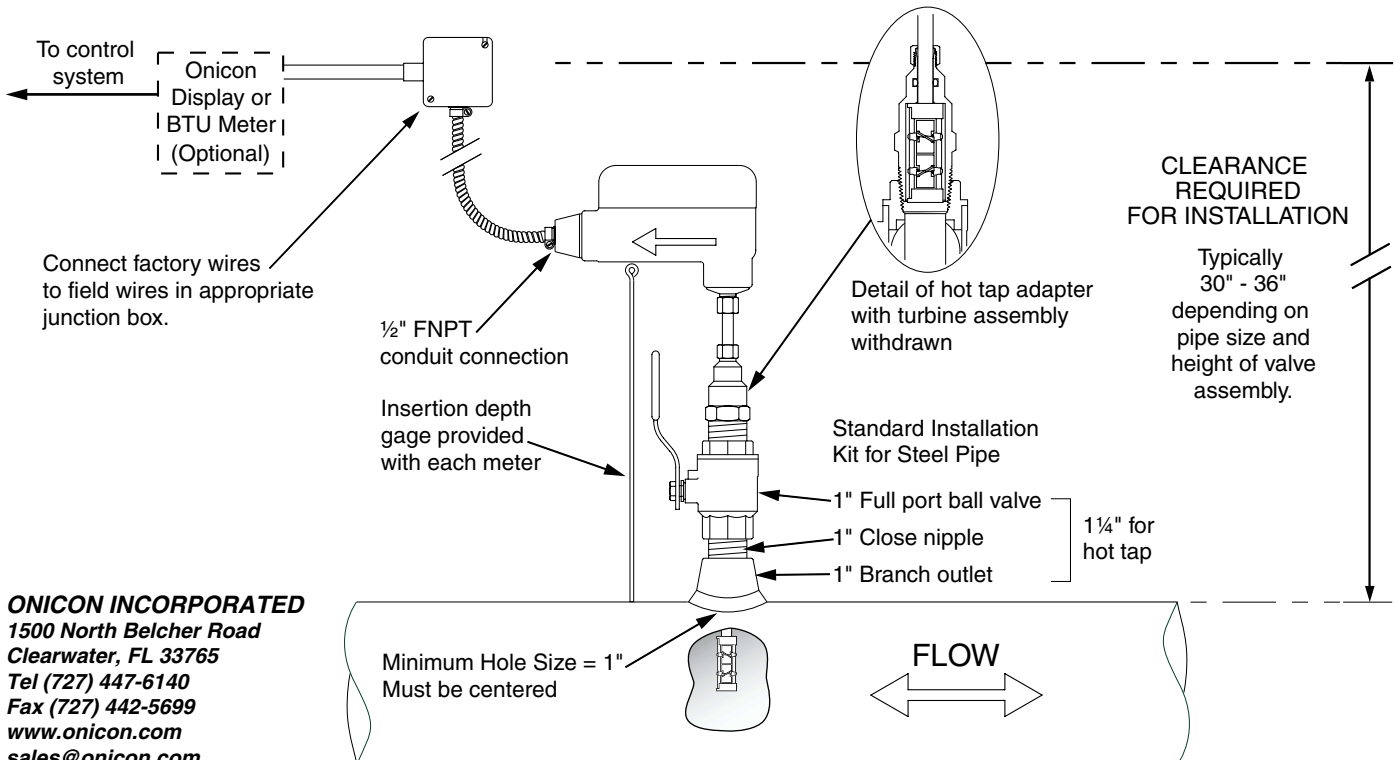

**ONICON INCORPORATED**  
1500 North Belcher Road  
Clearwater, FL 33765  
Tel (727) 447-6140  
Fax (727) 442-5699  
www.onicon.com  
sales@onicon.com

Note: Installation kits vary based on pipe material and application. For installations in pressurized (live) systems, use "Hot tap" 1 1/4 inch installation kit and drill hole using a 1 inch wet tap drill.