


I. MODEL NUMBERING SYSTEM

Format: F - XX YY

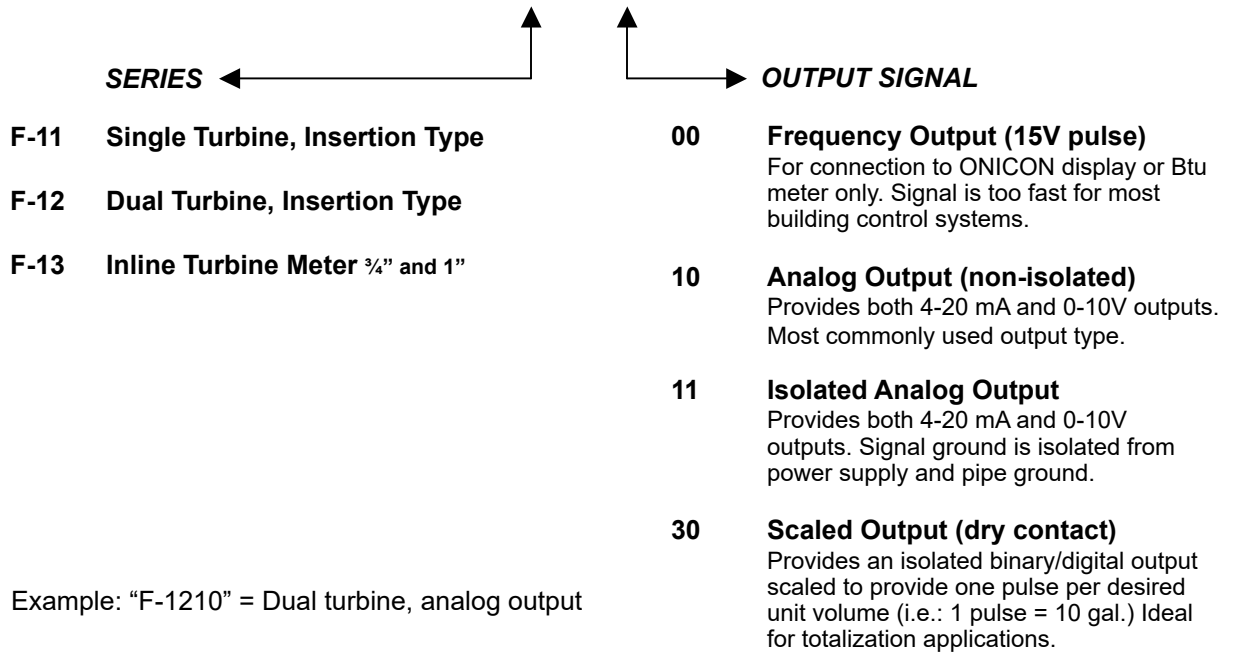

II. INSTALLATION HARDWARE

Purchase of installation kit with the flow meter (insertion type) is strongly recommended to prevent installation problems. Installation hardware kits are listed immediately after insertion type flow meters.

III. CALIBRATION DATA

ONICON flow meters are custom calibrated for each application. Pipe size, material, flow range, etc. is required for all meters. Use order form and fax or email directly to ONICON Incorporated. Order forms are provided in the product catalog and can be downloaded from ONICON's website. You may also use your own spread sheet, etc. to submit calibration data. Contact ONICON for assistance with calibration data questions.

IV. PERIPHERAL DEVICES AVAILABLE

Display Modules: See D-100 and D-1200 Series Display Modules
 Btu Meters: See System-10 Series Btu Meters (different order forms for these)

V. APPLICATION ASSISTANCE

Contact ONICON or your local sales representative for applications questions.