

**• F-1211 DUAL TURBINE •  
INSERTION FLOW METER  
ISOLATED ANALOG OUTPUT**



Made in the USA

**DESCRIPTION**

ONICON insertion turbine flow meters are suitable for measuring electrically conductive water-based liquids. The F-1211 model provides isolated 4-20 mA and 0-10 V analog output signals that are linear with the flow rate.

**APPLICATIONS**

- Chilled water, hot water, condenser water, and water/glycol/brine for HVAC
- Process water and water mixtures
- Domestic water

**GENERAL SPECIFICATIONS**

**ACCURACY**

- ± 0.5% OF READING at calibrated velocity
- ± 1% OF READING from 3 to 30 ft/s (10:1 range)
- ± 2% OF READING from 0.4 to 20 ft/s (50:1 range)

**SENSING METHOD**

Electronic impedance sensing  
(non-magnetic and non-photoelectric)

**PIPE SIZE RANGE**

2½" through 72" nominal

**SUPPLY VOLTAGE**

24±4 V AC/DC at 100 mA

**LIQUID TEMPERATURE RANGE**

Standard: 180° F continuous, 200° F peak  
High Temp: 280° F continuous, 300° F peak  
Meters operating above 250° F require  
316 stainless steel construction option

**AMBIENT TEMPERATURE RANGE**

-5 to 160° F (-20 to 70° C)

**OPERATING PRESSURE**

400 PSI maximum

**PRESSURE DROP**

Less than 1 PSI at 20 ft/s in 2½" pipe,  
decreasing in larger pipes and lower velocities

**OUTPUT SIGNALS PROVIDED:**

**ANALOG OUTPUT (ISOLATED)**

Voltage output: 0-10 V (0-5 V available)  
Current output: 4-20 mA

**FREQUENCY OUTPUT**

0-15 V peak pulse, typically less than 300 Hz

(continued on back)

**CALIBRATION**

Every ONICON flow meter is wet-calibrated in our flow laboratory against primary volumetric standards directly traceable to NIST. Certification of calibration is included with every meter.

**FEATURES**

**Unmatched Price vs. Performance** - Custom calibrated, highly accurate instrumentation at very competitive prices.

**Excellent Long-term Reliability** - Patented electronic sensing is resistant to scale and particulate matter. Low mass turbines with engineered jewel bearing systems provide a mechanical system that virtually does not wear.

**Industry Leading Two-year "No-fault" Warranty** - Reduces start-up costs with extended coverage to include accidental installation damage (miswiring, etc.). Certain exclusions apply; see our complete warranty statement for details.

**Installation Flexibility** - Patented dual turbine models deliver outstanding accuracy in short pipe runs.

**Simplified Hot Tap Insertion Design** - Standard on every insertion flow meter. Allows for insertion and removal by hand without system shutdown.

OPERATING RANGE FOR COMMON PIPE SIZES 0.17 TO 20 ft/s ± 2% accuracy begins at 0.4 ft/s	
Pipe Size (Inches)	Flow Rate (GPM)
2½	2.5 - 230
3	4 - 460
4	8 - 800
6	15 - 1800
8	26 - 3100
10	42 - 4900
12	60 - 7050
14	72 - 8600
16	98 - 11,400
18	120 - 14,600
20	150 - 18,100
24	230 - 26,500
30	360 - 41,900
36	510 - 60,900

# F-1211 SPECIFICATIONS cont.

## MATERIAL

- Wetted metal components
- Standard: Electroless nickel plated brass
- Optional: 316 stainless steel


## ELECTRONICS ENCLOSURE

- Standard: Weathertight aluminum enclosure
- Optional: Submersible enclosure

## ELECTRICAL CONNECTIONS

- 4-wire minimum for 4-20 mA or 0-10 V output
- Second analog output and/or frequency output requires additional wires
- Standard: 10' of cable with 1/2" NPT conduit connection
- Optional: Indoor DIN connector with 10' of plenum rated cable

## ALSO AVAILABLE

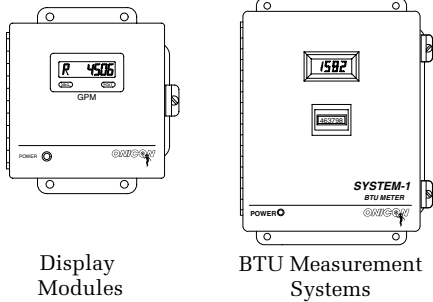


# F-1211 Wiring Information

WIRE COLOR CODE		NOTES
RED	(+) 24 V AC/DC supply voltage, 100 mA	Connect to power supply positive
BLACK	(-) Common ground (Common with pipe ground)	Connect to power supply negative
GREEN	(+) Frequency output signal: 0-15 V peak pulse	Required when meter is connected to local display or BTU meter
BLUE	(+) Analog signal: 4-20 mA (isolated)	Use yellow wire as (-) for these signals. Both signals may be used independently.
BROWN	(+) Analog signal: 0-10 V (isolated)	
YELLOW	(-) Isolated ground	Use for analog signals only
DIAGNOSTIC SIGNALS		
ORANGE	Bottom turbine frequency	These signals are for diagnostic purposes - connect to local display or BTU Meter
WHITE	Top turbine frequency	

## F-1211 Wiring Diagram

Flow Meter into Control System (No Display or BTU Meter)


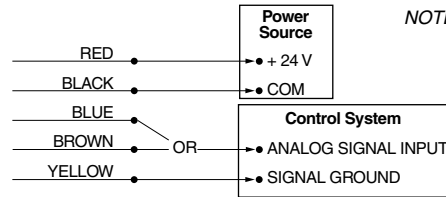


- NOTE: 1. Black wire is common with the pipe ground (typically earth ground).  
 2. Frequency output required for ONICON display module or BTU meter, refer to wiring diagram for peripheral device.

## Typical Meter Installation

(New construction or scheduled shutdown)

- Acceptable to install in vertical pipe
- Position meter anywhere in upper 180° for horizontal pipe

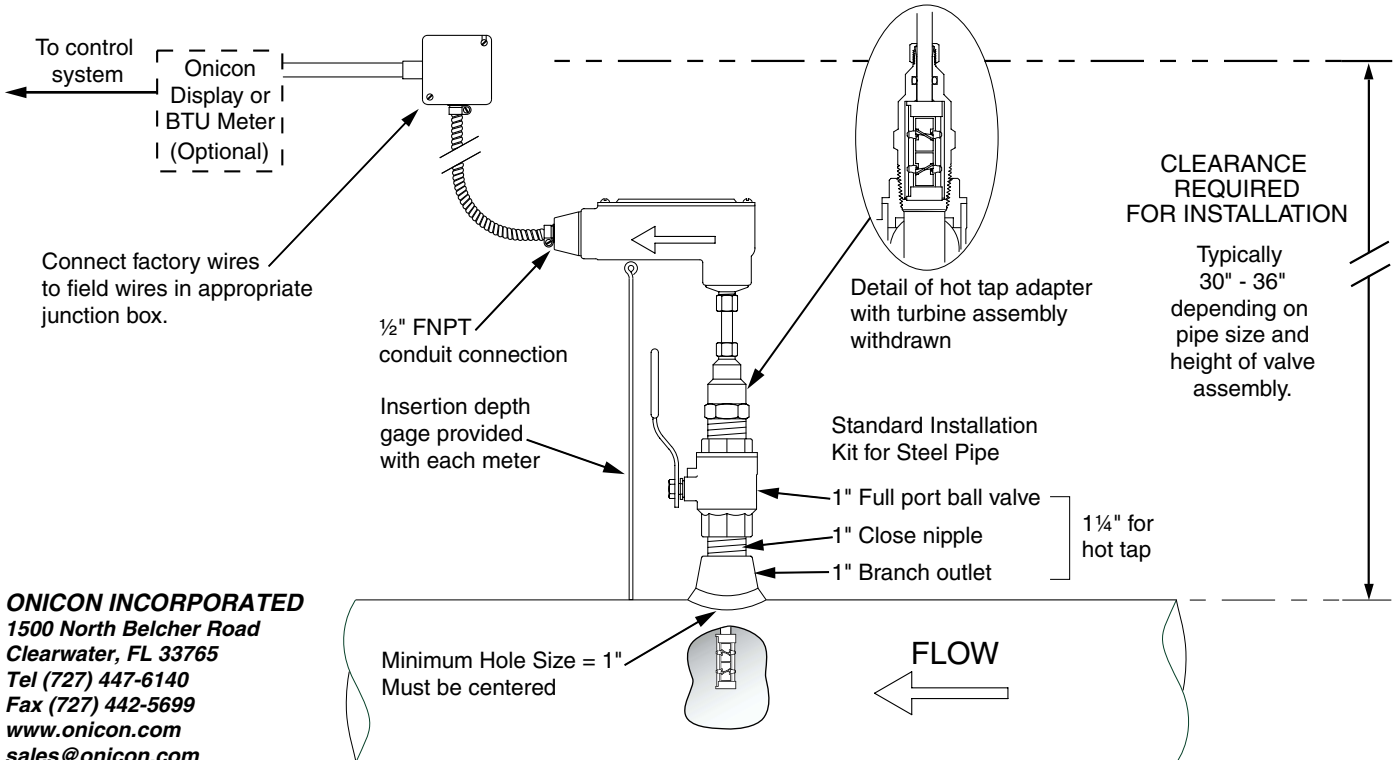

**ONICON INCORPORATED**  
 1500 North Belcher Road  
 Clearwater, FL 33765  
 Tel (727) 447-6140  
 Fax (727) 442-5699  
 www.onicon.com  
 sales@onicon.com

Note: Installation kits vary based on pipe material and application. For installations in pressurized (live) systems, use "Hot tap" 1 1/4 inch installation kit and drill hole using a 1 inch wet tap drill.